#### Photo

# **Descriptions**

Enables outdoor installation of branch box in case its installation is impossible.

#### TO BE CONFIRMED

## Applicable Models


- MXZ-8A140VA
- PAC-AK30BC
- PAC-AK50BC

## Specifications

TO BE CONFIRMED


### Dimensions


Unit: mm

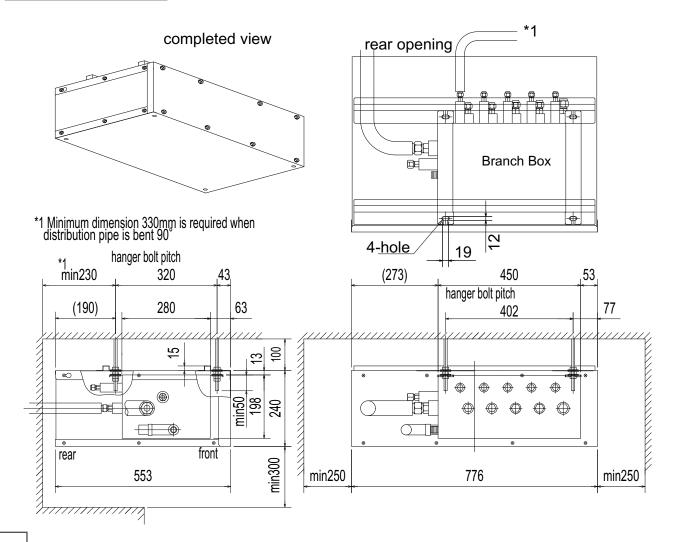

#### How to Use / How to Instal

1 Please check if you have all the following parts in the packing before installation:

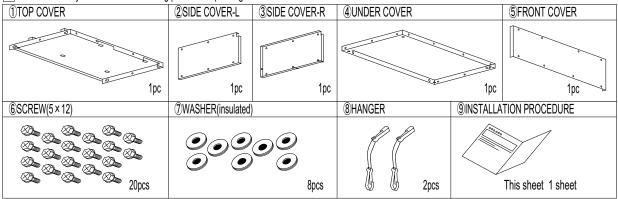

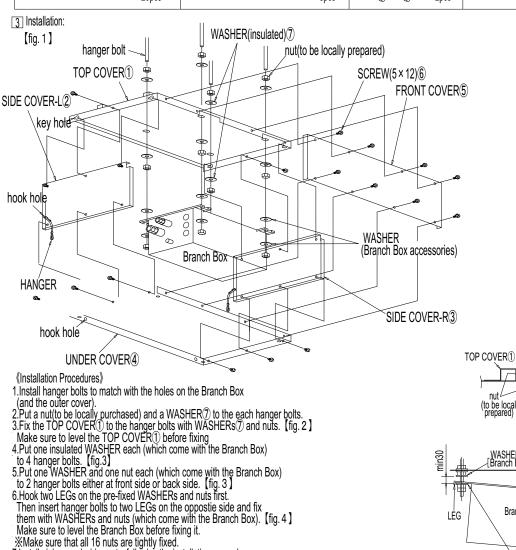

Make sure that all 16 nuts are tightly fixed.
 7.Install pipings and wirings etc, following the installation manual


7.Install pipings and wirings etc, following the installation manual of the Branch Box.

XPiping must be installed within the Outer Cover.

8.Fix the SIDE COVER\$\( 2\) & \( 3\) on both sides to the TOP COVER\$\( 1\) with SCREW\$\( 6\). First, put SCREW\$\( 6\) tentatively to the holes at the both upper ends of the SIDE COVER\$\( 2\) & \( 3\), then hook them to the key holes on the TOP COVER\$\( 1\).

9.Fix the UNDER COVER\$\( 4\) to the SIDE COVER\$\( 2\) & \( 3\) with SCREW\$\( 6\). Hook HANGER\$\( 8\) first to the rear holes on the SIDE COVER\$\( 2\) & \( 3\) and then hook the other end of the HANGERs to the rear hole on the UNDER COVER\$\( 4\). Thus you can avoid the UNDER COVER\$\( 4\) falling and the installation work will be easier. (facilitated).

10.Fix the FRONT COVER\$\( 5\) to the TOP COVER\$\( 1\) and the UNDER COVER\$\( 4\) with SCREW\$\( 6\). \*\*Make sure that all 20 SCREWs are tightly fixed.



[fig. 2]

WASHE (insulated)(7)